

L Series

Bill Acceptor

- Multinational currencies acceptable.
- New generation design of verification system.
- Anti-string technology.
- Selective interfaces.
- Multicolor illumination bezel design.
- Innovative bezel design.

(L70T/L77T)



ict

L Series


Bill Acceptor

The L Series bill acceptor combines improved bill-sensing technology with lightweight and durable plastic construction. It also features fast software updating, and easy maintenance to increase acceptance rates and reduce bill jammed.



L70

L70-P5

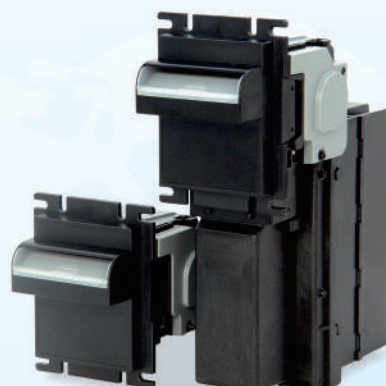

L77F

L77F-P5



L83

L83-P6



Without
metal bracket
L70T-P5/ L77T-P5

With
metal bracket
L70T-P5/ L77T-P5

L Series

Specifications



Acceptance Rate

96% or greater



Bill Insertion

Four-way



Bill Width Accepted

L70-P2/P5, L70#-P2/P5, L70F-P2/P5:
59~67mm/ 2.32~2.64 inches(67mm)
59~71mm/ 2.32~2.8 inches(71mm)

L70T-P5:
65~70mm/ 2.56~2.75 inches

L77F-P2/P5, L77T-P5:
72~77mm/ 2.83~3.03 inches

L83-P3/P6, L83#-P3/P6:
61~83mm/ 2.40~3.27 inches



Acceptance Speed

Approx. 3 seconds to cash box



Capacity

L70-P2, L70#-P2, L70F-P2: Approx. 200 notes

L70-P5, L70#-P5, L70F-P5: Approx. 500 notes

L77F-P2: Approx. 150 notes

L77F-P5: Approx. 500 notes

L83-P3, L83#-P3: Approx. 300 notes

L83-P6, L83#-P6: Approx. 600 notes

L70T-P5, L77T-P5: Approx. 500 notes



Interface

L70-P2/P5, L70#-P2/P5:
Pulse, RS232, RS232 A0, ccNet (compatible),
MDB, ccTalk

L70(IGT)-P2/P5:
Pulse, RS232, RS232 A0, IGT

L70F-P2/P5, L77F-P2/P5:
Pulse, RS232, RS232 A0, ccNet (compatible),
MDB, ccTalk, Pulse(Out of service)

L83-P3/P6:
Pulse, RS232, RS232 A0, ccNet (compatible),
MDB, ccTalk, GBA, Parallel, Parallel A4,
Pulse(Out of service)

L83#-P3/P6:
Pulse, RS232, RS232 A0, ccNet (compatible),
MDB, ccTalk, GBA, Pulse(Out of service)

L70T-P5, L77T-P5:
Pulse, RS232, RS232 A0, ccNet (compatible),
MDB, ccTalk, V2.2, Pulse(Out of service)



Power Source

L70#/ L70F/ L77F/ L83#/ L70T/ L77T:
12V DC(10~16V DC)

Others: 12V DC(10.8~13.2V DC)



Power Consumption

Standby: 0.3A, 3.6W
Operation: 1.2A, 14.4W
Maximum: 2A, 24W



Dimension

L70, L70#, L70F:
102.8 x 134.0 x 132.1 mm/ 4.05 x 5.28 x 5.20 inches

L70-P2, L70#-P2, L70F-P2:
102.8 x 285.7 x 188 mm/ 4.05 x 11.25 x 7.40 inches

L70-P5, L70#-P5, L70F-P5:
102.8 x 285.7 x 216.8 mm/ 4.05 x 11.25 x 8.54 inches

L77F:
102.4 x 134 x 131 mm/ 4.03 x 5.28 x 5.16 inches

L77F-P2:
102.4 x 272.6 x 172.8 mm/ 4.03 x 10.73 x 6.80 inches

L77F-P5:
102.4 x 272.6 x 221.2 mm/ 4.03 x 10.73 x 8.71 inches

L83, L83#:
117.4 x 86.1 x 138.5 mm/ 4.62 x 3.39 x 5.45 inches

L83P3, L83#-P3:
121.7 x 265.5 x 222.2 mm/ 4.79 x 10.45 x 8.75 inches

L83P6, L83#-P6:
121.7 x 265.5 x 269.2 mm/ 4.79 x 10.45 x 10.6 inches

L70T-P5, L77T-P5:
Without metal bracket: 252.6 x 106.8 x 230.6 mm/
9.94 x 4.20 x 9.08 inches
With metal bracket: 357 x 136.4 x 234.1 mm/
14.79 x 5.37 x 9.22 inches



Weight

L70, L70#, L70F: Approx. 0.52kg/ 1.15 lbs

L70-P2, L70#-P2, L70F-P2: Approx. 1.25kg/ 2.76 lbs

L70-P5, L70#-P5, L70F-P5: Approx. 1.4 kg/ 3.09 lbs

L77F: Approx. 0.44kg/ 0.97 lbs

L77F-P2: Approx. 1.35kg/ 2.98 lbs

L77F-P5: Approx. 1.42kg/ 3.13 lbs

L83, L83#: Approx. 0.8 kg/ 1.76 lbs

L83-P3, L83#-P3: Approx. 1.46kg/ 3.22 lbs

L83-P6, L83#-P6: Approx. 1.65kg/ 3.64 lbs

L70T-P5, L77T-P5: Approx. 1.42kg
(Without metal bracket)
Approx. 7kg
(With metal bracket)



Environmental

Operation Temperature:

L70/ L83: 0°C/ 32°F~55°C/ 131°F

L70F/ L77F/ L70T/ L77T: 0°C/ 32°F~60°C/ 140°F

L70#/ L83#: 0°C/ 32°F ~65°C/ 149°F

Storage Temperature: -20°C/ -4°F~70°C/ 158°F

Humidity: 30%~85% RH (no condensation)



Recommended Applications

Amusement, Gaming, Vending



ict

Specifications are subject to change without prior notice.



International Currency Technologies

No.28, Ln. 15, Sec. 6, Minquan E. Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

Phone: +886-2-2793-1236

Fax: +886-2-2793-6125

EMail: sales@ictgroup.com.tw (Product Information)

fae@ictgroup.com.tw (Technical Service)

Website: www.ictgroup.com.tw
